

## DATASHEET

SKU: 10332ZA

### Benelec 2 Way UHF Band Phasing Harness

360-520MHz, N Socket



The 10332ZA phasing harness is a two-way cable power divider intended for the coupling of two UHF side mount dipoles. This Phasing Harness comes with a female input connector and two female output connectors. It affords a wide bandwidth, matching that of the two-stack array.


#### FEATURES

- Wide bandwidth
- Medium Power
- Quality connectors
- Plated brass components

#### MECHANICAL SPECIFICATIONS

Base Materials:	Chromed Brass
Length:	295mm output to output

#### VSWR

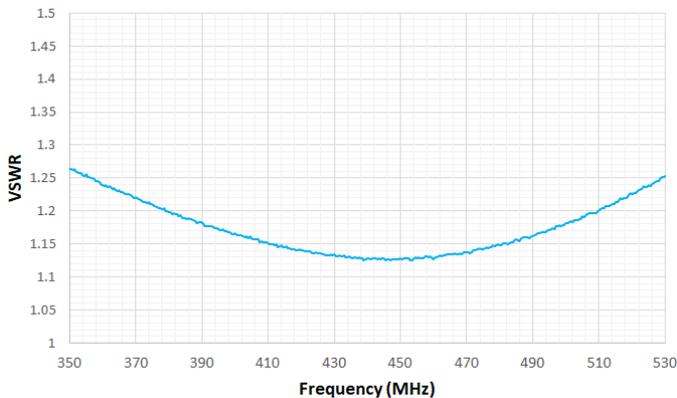

#### ELECTRICAL SPECIFICATIONS

VSWR	<1.25:1 @ 360 - 520MHz
Impedance:	50 Ohms nominal
Power Rating:	200 Watts
Cable:	RG11
Termination:	N Female input/N female outputs

#### WARRANTY

12 months (Please refer to [Benelec Terms & Conditions](#))

Website: [benelec.au](http://benelec.au)